

Technical Data Sheet

A High Performance – Handheld Base Station Analyzer


MT8222A
 BTS Master™

Introduction

High performance handheld base station analyzer with a complete set of measurement tools, spectrum analyzer, cable and antenna analysis, power meter, Bit Error Rate Tester for communication backhaul, supports multiple modulation formats GSM/GPRS/EDGE, W-CDMA/HSDPA, CDMA/EVDO, WiMAX 802.16d/802.16e, TD-SCDMA and GPS.

High Performance Highlights

- Spectrum Analyzer
- 2 port Cable & 10 MHz to 4 or 6 GHz
- High Accuracy Power Meter ± 0.16 dB
- 4 kg (9.0 lbs)
- 100 kHz Error Rate Test
- Antenna Analyzer
- Channelscanner
- GPS receiver option
- 2 and 2.5G modulation
- E1, 3G1 Modulation options
- W-CDMA/HSDPA, 1xrtt/EVDO and TD-SCDMA
- 3.5G modulation options
- 802.16e options
- 2.5 – 3 hour battery

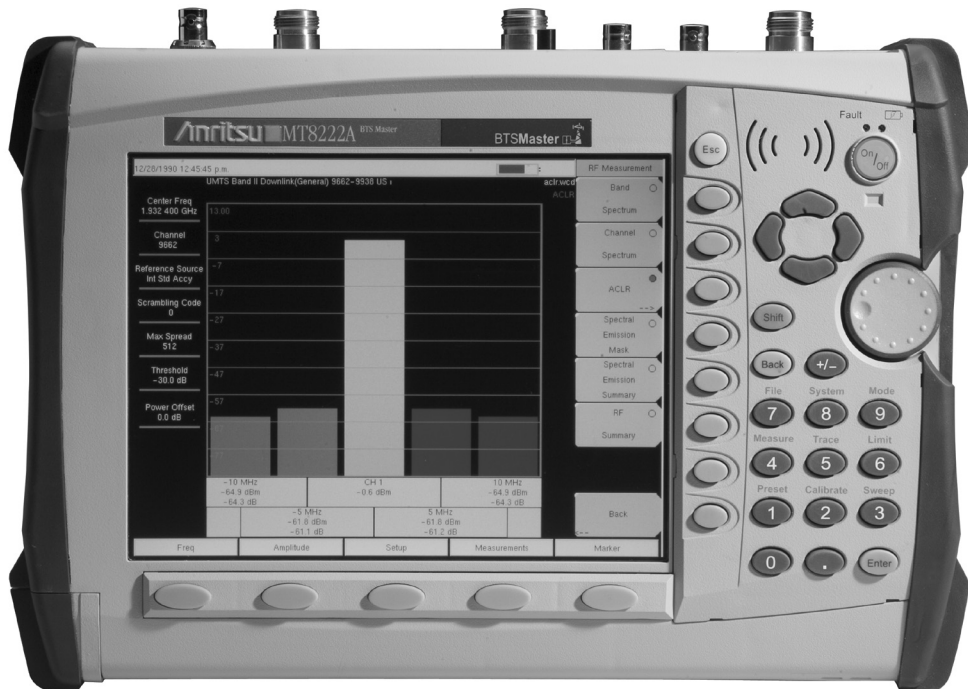

The Anritsu MT8222A is the most advanced ultra-portable base station analyzer on the market, featuring unparalleled performance at a modest price.

Specifications

Cable and Antenna Analyzer

Frequency Range: 10 MHz to 4 GHz

Frequency Range (Option 26):

10 MHz to 6 GHz (All other specs remain the same)

Frequency Accuracy: 25 ppm

Frequency Resolution: 10 kHz

Data Points: Low, Medium, High (137/275/551)

Interference Immunity:

On-Channel: +17 dBm

On-Frequency: 0 dBm (RF Out) +30 dBc RF in

1-Port Power: High: 0 dBm (typical)

2-Port Power:

High: 0 dBm (typical)

Low: -35 dBm (typical)

Corrected Directivity: 42 dB (10 MHz to 6 GHz)

1-Port Accuracy:

= $<0.8 + \square 20 \log(1 \pm 10^{\text{ppm}}) \square$ dB, typical EΔ =

Directivity – Measured Return Loss

System Dynamic Range:

80 dB, 10 MHz to 3 GHz

70 dB, >3 GHz to 5.5 GHz

65 dB, >5.5 GHz to 6 GHz

Return Loss:

Range: 0 to 60 dB

Resolution: 0.01 dB

VSWR:

Range: 1 to 65

Resolution: 0.01

Cable Loss:

Range: 0 to 30 dB

Resolution: 0.01 dB

1-Port Phase:

Range: -180° to +180°

Resolution: 0.01°

Smith Chart:

Resolution: 0.01

2-Port Gain:

Range: -120 to 100 dB

Resolution: 0.01 dB

2-Port Phase:

Range: -180° to +180°

Resolution: 0.01°

Distance-to-Fault:

Fault Resolution (meters): $(1.5 \times 10^8 \times \text{vp}) / \Delta F$ vp is

the propagation constant and ΔF is F2-F1 in Hz

Horizontal Range (meters): 0 to (data points-1) x

Fault Resolution to a maximum of 1500m (4921 ft.)

where datapoints = 137/275/551

Vertical Range (Return Loss): 0 to 60 dB

Vertical Range (VSWR): 1 to 65

Spectrum Analyzer

Frequency:

Frequency: 100 kHz to 7.1 GHz

Maximum Continuous Input: +30 dBm

Tuning Resolution: 1 Hz

Frequency Reference:

Aging: ± 1 ppm/10 years

Accuracy: ± 0.3 ppm (25 °C ± 25 °C) + aging

Frequency Span:

10 Hz to 7.1 GHz plus 0 Hz (zero span)

Sweep Time:

Minimum 100 ms, 10 μ s to 600 seconds (zero span)

Sweep Trigger: Free run, Single, Video, External

Resolution Bandwidth:

(-3 dB width) $\pm 10\%$, 1 Hz to 3 MHz in

1-3 sequence 8 MHz demodulation bandwidth

Video Bandwidth:

(-3 dB) 1 Hz to 3 MHz in 1-3 sequence

SSB Phase Noise:

-100 dBc/Hz max at 10, 20 and 30 kHz offset from

carrier -102 dBc/Hz max at 100 kHz offset from carrier

Amplitude:

Measurement Range: DANL to +30 dBm

Absolute amplitude accuracy Power Levels

≥ -50 dBm, ≤ 35 dB input attenuation,

Preamplifier Off:

100 kHz to ≤ 10 MHz ± 1.5 dB

>10 MHz to 4 GHz ± 1.25 dB

>4 GHz to 7.1 GHz ± 1.75 dB

Displayed Average Noise Level

(DANL in 1 Hz RBW, 0 dB attenuation,

Reference level -50 dBm, preamp on):

Frequency	Typical	Max
-----------	---------	-----

10 MHz to 1 GHz	-163 dBm	-161 dBm
-----------------	----------	----------

>1 GHz to 2.2 GHz	-160 dBm	-159 dBm
-------------------	----------	----------

>2.2 GHz to 2.8 GHz	-156 dBm	-153 dBm
---------------------	----------	----------

>2.8 GHz to 4.0 GHz	-160 dBm	-159 dBm
---------------------	----------	----------

>4.0 GHz to 7.1 GHz	-158 dBm	-154 dBm
---------------------	----------	----------

Input-Related Spurious:

(-30 dBm input, 0 dB input attenuation,

Span <1.7 GHz)

-70 dBc typical -60 dBc max*

* **Exceptions:**

Input Frequency	Spur Level
1674 MHz	-38 dBc (-48 typical)

Residual Spurious:

(Preamplifier on, RF input terminated, 0 dB input attenuation)

-100 dBm max

(Preamplifier off, RF input terminated, 0 dB input attenuation)

-90 dBm max**, 100 kHz to <3200 MHz

-84 dBm max**, 3200 to 7100 MHz

****Exceptions:**

Frequency Max Spur Level (Typical)

250, 300, and 350 MHz -85 dBm

~4010 MHz -80 dBm (-90 dBm)

~5084 MHz -70 dBm (-83 dBm)

~5894 MHz -75 dBm (-87 dBm)

~7028 MHz -80 dBm (-92 dBm)

Display Range:

1 to 15 dB/div in 1 dB steps. Ten divisions displayed

Amplitude Units Log Scale Modes:

dBm, dBV, dBmV, dB μ V

Attenuator Range: 0 to 65 dB

Attenuator Resolution: 5 dB steps

Power Meters:

Frequency Range: 10 MHz to 7.1 GHz

Display Range: -80 dBm to +80 dBm

Measurement Range: -60 dBm to +30 dBm

Offset Range: 0 to +60 dB

Accuracy:

-40 dBm <Max \leq +15 dBm:

10 MHz -4 GHz: ± 1.25 dB

4 GHz -7.1 GHz: ± 1.75 dB

Max > +15 dBm:

10 MHz -6.5 GHz: ± 1.75 dB

6.5 GHz -7 GHz: ± 2 dB

Max \leq -40 dBm:

10 MHz -4 GHz: ± 1.5 dB

4 GHz -7.1 GHz: ± 1.75 dB

VSWR: 1.5:1 typical

Maximum Power:

+30 dBm (1W) without external attenuator

W-CDMA/HSDPA

RF Measurements (Option 44)

Frequency Ranges:

Bands I - IX

RF Channel Power

(Temperature range 15° C to 35° C):

± 0.7 dB typical

(± 1.25 dB max)

Occupied Bandwidth Accuracy: ± 100 kHz

Residual Adjacent Channel

Leakage Ratio (ACLR)

(824 to 894 MHz, 1710 to 2170):

-54 dB typical at 5 MHz offset

-59 dB typical at 10 MHz offset

Leakage Ratio (ACLR)¹ (2300-2700 MHz):

-54 dB typical at 5 MHz offset

-57 dB typical at 10 MHz offset

ACLR Accuracy (Single Channel Active)

(824 to 894 MHz, 1710 to 2170):

± 0.8 dB for ACLR \geq -45 dB at 5 MHz offset

± 0.8 dB for ACLR \geq -50 dB at 10 MHz offset

ACLR Accuracy (Single Channel Active)

(2300-2700 MHz):

± 1.0 dB for ACLR \geq -45 dB at 5 MHz offset

± 1.0 dB for ACLR \geq -50 dB at 10 MHz offset

Frequency Error: ± 10 Hz + Time Base Error,

99% confidence level:

± 10 Hz + Time Base Error, 99% confidence level

W-CDMA Demodulation

and W-CDMA/HSDPA

Demodulator (Options 45 and 65)

EVM Accuracy (824 to 894 MHz, 1710 to 2170 MHz):

(3GPP Test Model 4) $\pm 2.5\%$; 6% \leq EVM $\leq 25\%$

(3GPP Test Model 5) $\pm 2.5\%$; 6% \leq EVM $\leq 20\%$

(2300 MHz to 2700 MHz)

EVM Accuracy: $\pm 2.5\%$ for 6% \leq EVM $\leq 20\%$

Residual EVM: 2.5% typical

Code Domain Power:

± 0.5 dB for code channel power $>$ -25 dB

16, 32, 64 DCPH (test model 1)

16, 32 DCPH (test model 2, 3)

CPICH (dBm) Accuracy: ± 0.8 dB typical

Scrambling Code: 3 seconds

W-CDMA/HSDPA OTA (Option 35)

Resolution: 0.1 dB

Power Monitor (Option 5)

(requires external sensor)

Display Range: -80 to +80 dBm (10 pW to 100 kW)

Measurement Range:

-40 to +20 dBm (10 nW to 40 mW)

Offset Range: 0 to +60 dB

Resolution: 0.1 dB or 0.1W

Accuracy:

± 1 dB for $>$ -40 dBm using 560-7N50 detector

Bias Tee (Option 10)

Voltage/Current:

+12 V, 250, or 500 mA steady state

+15 V, 250, or 500 mA steady state

+18 V, 350 mA steady state

+21 V, 250 mA steady state

+24 V, 250 mA steady state

¹ Depends on reference level, input signal level and single channel conditions

Interference Analyzer (Option 25)

Strength of the Interferer: Locate the Interferer

RSSI: Collect data up to 72 hours

Spectrogram: Collect data up to 72 hours

Signal ID:

Monitors one particular frequency or scan the span and identify up to 12 signals. Identifies CDMA, GSM and WCDMA signals with Signal-to-noise ratio greater than 10 dB.

Channel Scanner (Option 27)

Frequency Range: 100 KHz to 7.1 GHz

Frequency Accuracy:

±10 Hz + Time base error, 99% Confidence level

Measurement Range: +20 dBm to -110 dBm

Channel Power:

100 kHz to ≤10 MHz ±1.5 dB

>10 MHz to 4 GHz ±1.25 dB

>4 GHz to 7.1 GHz ±1.75 dB

Adjacent Channel Power Accuracy: ±0.75 dB

GPS (Option 31)

GPS Location Indicator:

Latitude, Longitude and Altitude on display

Latitude, Longitude and Altitude with trace storage

GPS High Frequency Accuracy

when GPS antenna is connected:

±25 ppb with GPS ON, 3 minutes after satellite lock

Internal High Accuracy, when

GPS antenna is not connected:

Better than ±50 ppb for 3 days from a High Accuracy

GPS Lock and within 0° C to 50° C ambient temperature

GSM/GPRS/EDGE

RF Measurements (Option 40)

Occupied Bandwidth:

Bandwidth within which 99% of the power transmitted on a single channel lies

Burst Power:

±1 dB typical for -50 dBm to +20 dBm (±1.5 dB max)

Frequency Error:

±10 Hz + time base error, 99% confidence level

GSM/GPRS/EDGE

Demodulator (Option 41)

GSMK Modulation Quality

(RMS Phase) Measurement Accuracy: ±1 deg

Residual Error (GSMK): 1 deg

8PSK Modulation Quality

(EVM) Measurement Accuracy: ±1.5%

Residual Error (8PSK): 2.5%

CDMA – RF Measurements (Option 42) and EVDO RF Measurements (Option 62)

Channel Power Accuracy:

±1 dB typical for RF Input from +20 dBm to -50 dBm (±1.5 dB maximum)

cdmaOne and CDMA2000 1xRTT Demodulator (Option 43)

Residual Rho:

>0.995 typical for RF Input from +20 dBm to -50 dBm (>0.99 dB maximum)

Rho Accuracy: ±0.005 for Rho >0.9

Frequency Error:

±10 Hz + Time base error, 99% confidence level (in slow mode)

PN Offset: with 1 x 64 chips

Pilot Power Accuracy:

±1 dB typical, relative to Channel Power

Tau: ±0.5 µs typical (±1 µs maximum)

EVDO Demodulator (Option 63)

Demodulator Measurements are

EVDO Rev A compatible.

Residual Rho:

>0.995 typical for RF Input from +20 dBm to -50 dBm (>0.99 dB maximum)

Rho Accuracy: ±0.01 for Rho >0.9

Frequency Error:

±20 Hz + Time base error, 99% confidence level

PN Offset: within 1 x 64 chips

Pilot Power Accuracy:

±1 dB typical relative to Channel Power

Tau: ±0.5 µs typical (±1 µs maximum)

cdmaOne and CDMA2000 1xRTT Over The Air (Option 33) and EVDO Over The Air (Option 34)

Over The Air Measurement:

Nine strongest pilots with Tau and Ec/Io.

Six multipaths relative to strongest pilot.

Fixed WiMAX RF Measurements (Option 46)

Channel Power Accuracy¹:

±1 dB Typical for +20 dBm to -50 dBm

(±1.5 dB max)

Fixed WiMAX Demodulator (Option 47)

Residual EVM (rms):

3% for +20 dBm to -50 dBm (3.5% max.)

Frequency Error:

±0.1 ppm + time base error, 99% confidence level

Mobile WiMAX Specifications

Bandwidths:

3.5 MHz, 5 MHz, 7 MHz 8.75 MHz, 10 MHz

Frame Length: 5 ms, 10 ms

Zone Types: PUSC

DL-MAP Support:

Regular and Compressed Map, DIUC support

DL-MAP Auto Decoding: Convolutional Coding (CC),

Convolution Turbo Coding (CTC)

Mobile WiMAX Over the Air (OTA) Measurements (Option 37)

Time Interval: 1 sec – 60 sec

Measurement Duration: 72 hours max

Auto Save: Yes

GPS Logging: Yes

Mobile WiMAX RF Measurements (Option 66)

Channel Power Accuracy:

±1 dB Typical (±1.5 dB max)

for +20 dBm to -50 dBm

Mobile WiMAX Demodulator (Option 67)

For +20 dBm to -50 dBm, Residual EVM (rms):

2.5% typical (3% max), at -50 dBm on FCH

Frequency Error:

±0.02 ppm + time base error, 99% confidence level

TD-SCDMA RF Measurements (Option 60)

Channel Power (RRC): ±1 dB typical, 1.5 dB max

(slot power from +10 dBm to -40 dBm)

TD-SCDMA Demodulator (Option 61)

Residual EVM (rms):

3% typical (for P-CCPCH slot, slot power >-50 dBm)

Freq Error Accuracy:

±10 Hz typical + time base error (in the presence of a downlink slot)

Timing Error (Tau) for dominant SYNC-DL code:

±0.2 ls (external trigger)

Supported Modulation: QPSK

Spreading Factor: 1, 16

TD-SCDMA Over the Air (OTA) Measurements (Option 38)

32 codes displaying Ec/Io, Tau

Frequency Error:

±0.02 ppm + time base error, 99% confidence level

T1 Bit-Error-Rate-Tester (BERT), (Option 51)

T1 Analyzer, Fractional T1 and sub-channels BER testing at 1.544 MB, 64, 16 and 8 kB rates

Line Coding: AMI, B8ZS

Framing Modes:

D4 (Superframe), ESF (Extended Superframe)

Connection Configurations:

Terminate: 100 Ω

Bridge: ≥1000 Ω

Monitor: Connect via 20 dB pad in DSX

Receiver Sensitivity:

Terminate: +6 dB to -36 dB

Bridge: +6 dB to -36 dB

Monitor: 20 dB flat gain

Transmit Level: 0 dB, -7.5 dB, and -15 dB Clock

Sources: External Bits Clock

Internal: 1.544 MHz ±5 ppm

Pulse Shapes: Conform to ANSI T1.403 and ITU G.703

Pattern Generation and Detection:

PRBS: 2-9, 2-11, 2-15, 2-20, 2-23

Inverted and non-inverted

QRSS, 1-in-8 (1-in-7), 2-in-8, 3-in-24,

All ones, All zeros, T1-Daly, User defined (≤32 bits)

Circuit Status Reports:

Carrier present, Frame ID and Sync.,

Pattern ID and Sync.

Alarm Detection: AIS (Blue Alarm), RAI (Yellow Alarm)

Error Detection: Frame Bits, Bit, BER, BPV, CRC

Error Sec Error Insertion:

Bit, BPV, Framing Bits, RAI, AIS

Loopback Modes: Self loop, CSU, NIU, User defined, In-band or Data Link

Level Measurements:

Vp-p (±5%), can also display in dBdsx

Data Log: Continuous, up to 72 hrs

T1 Frequency Measurement: ±5 ppm

DS0 Channel Access: Tone Generator

Frequency: 100 Hz to 3000 Hz

Level: -30 to 0 dBm, with 1 dB steps

VF Measurement:

Frequency: 100 Hz to 3000 Hz, ±3 Hz

Level: -40.0 to +3.0 dBm, ±0.2 dBm

Audio Monitor: Manually select channel 1 to 24

ITU G-821 Analysis:

Error seconds (ES), error free seconds (EFS), severely

errored seconds (SES), unavailable seconds (UAS),

available seconds (AS), degrade minutes (DGRM)

¹Channel power accuracy will vary with amount of data burst traffic

E1 - 2 MB/s Bit-Error-Rate-Tester (BERT), (Option 52)

E1 - 2 MB/s Analyzer, sub-channels

BER testing:

BER testing at 2.048 MB, 64, 16 and 8 kB rates

Line Coding: AMI, HDB3

Framing Modes:

PCM30, PCM30CRC-4, PCM31, PCM31CRC-4

Connection Configurations:

Terminate: 75 Ω BNC unbalanced,
120 Ω RJ48C balanced

Bridge: >1000 Ω

Monitor: Connect via 20 dB pad in DSX

Receiver Sensitivity:

Terminate: +6 dB to -43 dB

Bridge: +6 dB to -43 dB

Monitor: 20 dB flat gain

Clock Sources:

External Sets clock,

Internal: 2.048 MHz \pm 5 ppm

Pulse Shapes: Conform to ITU G.703

Pattern Generation and Detection:

PRBS: 2-9, 2-11, 2-15, 2-20, 2-23

Inverted and non-inverted

QRSS, 1-in-8 (1-in-7), 2-in-8, 3-in-24,

All ones, All zeros, User defined (\leq 32 bits)

Circuit Status Reports:

Carrier present, Frame ID and Sync.,

Pattern ID and Sync.

Alarm Detection: AIS, RAI, MFAS RAI (PCM-30)

Error Detection:

Frame Bits, BER (FAS), Bit, CRC-4, E-Bits, BPV

Error Analysis: Error rates, Error Counts

ITU G-821 Analysis:

Errored seconds, error free seconds, severely errored seconds, unavailable seconds, available seconds, degraded minutes

Error Insertion: E-bit, Framing Bits (FAS), RAI, AIS

Loopback Modes: Self loopback

Level Measurements: Vp-p (\pm 5%)

Data Log: Continuous, up to 72 hrs

E1 - 2 MB/s Frequency Measurement: \pm 5 ppm

VF Tone Generator:

Frequency: 100 Hz to 3000 Hz

Level: -30 to 0 dBm with 1 dB steps

Audio Monitor: manually select channel 1-31

VF Measurement:

Frequency: 100 Hz to 3000 Hz \pm 3 Hz

Level: -40.0 to +3.0 dBm \pm 0.2 dBm

T3/T1/FT1 Bit-Error-Rate-Tester (BERT), (Option 53)

T3 Analyzer

Line Coding: B3ZS, AMI

Framing Modes: Unframed, M13, C-bit

Connection Configurations:

Terminate (75 Ω) BNC unbalanced

Monitor (Connect via 20 dB pad in DSX)

Receiver Sensitivity: +6 dB to -24 dB

Transmit Level:

DSX, Low, Pulse shape: conforms to ITU G.703

Clock Sources:

External, Internal: 44.736 MHz \pm 5 ppm

Pulse Shapes: Conform to ANSI T1.102 & ITU G.703

Pattern Generation and Detection:

PRBS: 2-9, 2-11, 2-15, 2-20, 2-23

Inverted and non-inverted,

User defined (\leq 32 bits)

Circuit Status Reports:

Carrier present, Frame ID and Sync.,

Pattern ID and Sync.

Alarm Detection: AIS (Blue Alarm), RAI (Yellow Alarm)

Error Detection:

Frame Bits, Bit, BER, BPV, FEBE,

C-bit, P-bit, Error Sec

Error Insertion: Bit, Framing Bits

Loopback Modes:

Stuff Bit (M13 & C-bit): 1 of DS1

FEAC (C-bit): DS3, 1 of DS1 all DS1

Level Measurements:

Vp-p (\pm 5%), can also display in dBdsx

Data Log: Continuous, up to 72 hrs

T3 Frequency Measurement: \pm 5 ppm

ITU G-821 Analysis:

Errored seconds, error free seconds, severely errored seconds, unavailable seconds, available seconds, degraded minutes 32 bits)

T1 Analyzer, Fractional T1 and sub-channels

BER Testing:

BER testing at 1.544 MB, 64, 16 and 8 kB rates

Line Coding: AMI, B8ZS

Framing Modes:

D4 (Superframe), ESF (Extended Superframe)

Connection Configurations:

Terminate: 100 Ω balanced, Bantam

Bridge: \leq 1000 Ω

Monitor: Connect via 20 dB pad in DSX

Receiver Sensitivity:

Terminate: +6 dB to -36 dB

Bridge: +6 dB to -36 dB

Monitor: 20 dB flat gain

Transmit Level: 0 dB, -7.5 dB, and -15 dB

Clock Sources:

External Bits clock,

Internal: 1.544 MHz \pm 5 ppm

Pulse Shapes: Conform to ANSI T1.403 & ITU G.703

Pattern Generation and Detection:

PRBS: 2-9, 2-11, 2-15, 2-20, 2-23 Inverted and non-inverted, QRSS, 1-in-8 (1-in-7), 2-in-8, 3-in-24, All ones, All zeros, T1-Daly, User defined (\leq 32 bits)

Circuit Status Reports:

Carrier present, Frame ID and Sync.,

Pattern ID and Sync.

Alarm Detection: AIS (Blue Alarm), RAI (Yellow Alarm)

Error Detection:

Frame Bits, Bit, BER, BPV, CRC, Error Sec

Error Insertion: Bit, BPV, Framing Bits, RAI, AIS

Loopback Modes:

Self loop, CSU, NIU, User defined,

In-band or Data Link

Level Measurements:

Vp-p (\pm 5%), can also display in dBdsx

Data Log: Continuous, up to 72 hrs

T1 Frequency Measurement: \pm 5 ppm

DS0 Channel Access:

Tone Generator Frequency: 100 Hz to 3000 Hz

Level: -30 to 0 dBm, with 1 dB steps

VF Measurement:

Frequency: 100 Hz to 3000 Hz, \pm 3 Hz

Level: -40.0 to +3.0 dBm, \pm 0.2 dBm

Audio Monitor:

Manually select channel 1 to 24

ITU G-821 Analysis:

Errored seconds, error free seconds, severely errored seconds, unavailable seconds, available seconds, degraded minutes

*High Accuracy Power Meter
Specifications using PSN50
(Option 19)*

Sensor

Measurement Range: -30 to +20 dBm
Frequency Range: 50 MHz to 6 GHz
Input Connector: Type N, male, 50 Ω
Max Input Without Damage: +33 dBm, ±25 VDC
Input Return Loss:
 50 MHz to 2 GHz: ≥26 dB
 2 GHz to 6 GHz: ≥20 dB

Accuracy

Total RSS Measurement Uncertainty (0 to 50° C):
 ±0.16 dB*
Noise: 20 nW max
Zero Set: 20 nW
Zero Drift: 10nW max**
Sensor Linearity: ±0.13 dB max
Instrumentation Accuracy: 0.00 dB
Sensor Cal Factor Uncertainty: ±0.06 dB
Temperature Compensation: ±0.06 dB max
Continuous Digital Modulation Uncertainty:
 +0.06 dB (+17 to +20 dBm)



PSN50 High Accuracy Power Sensor

*High Accuracy Power Meter
Specifications using MA24106A
(Option 19)*

Sensor

Measurement Range: -40 to +23 dBm
Frequency Range: 50 MHz to 6 GHz
Input Connector: Type N, male, 50 Ω
Max Input Without Damage: +33 dBm, ±25 VDC
Input Return Loss:
 50 MHz to 2 GHz: >26 dB
 2 GHz to 6 GHz: >20 dB

Accuracy

Total RSS Measurement Uncertainty (0 to 50° C):
 ±0.16 dB*
Noise: 2.5 nW max
Zero Set: 10 nW
Zero Drift: 3 nW max**
Sensor Linearity: ±0.18 dB max
Instrumentation Accuracy: 0.00 dB
Sensor Cal Factor Uncertainty: ±0.06 dB
Temperature Compensation: ±0.06 dB max
Continuous Digital Modulation Uncertainty:
 ±0.02 dB (< +18 dBm)
 ±0.10 dB (>= +18 dB)

System

Measurement Resolution: 0.01 dB
Offset Range: ±60 dB
Interfaces: USB A/mini-B 2.0

General Specifications

Maximum Continuous Input into Spectrum Analyzer:
 10 dB attenuation, +30 dBm, ±50 VDC
RF Input VSWR:
 2.0:1 maximum, 1.5:1 typical (≥10 dB attenuation)
Internal Time Base Accuracy: ±0.3 ppm
Interfaces:

Type N female RF Connector
 Type N female RF Out Port and RF In Port (50 Ω)
 BNC female connectors for external reference and external trigger
 Reverse BNC connector for GPS antenna
 E1-2Mb/s (Receive and Transmit):
 RJ48 (75 Ω) connector and BNC(f) (120 Ω)
 T1 (Receive and Transmit): Bantam Jack (100 Ω)
 T1, T3 (Receive and Transmit):
 Bantam Jack (100 Ω) and BNC (75 Ω)
 RF Detector: Type N(m) 50 Ω
 RJ45 connector for Ethernet 10/100-Base T
 2.5 mm 3-wire cellular headset connector
 5-pin Mini-B USB 2.0 device connector
 USB 2.0 Host connector used with PSN50 and USB Flash Drives

Maximum Input (Damage Level) into Cable and Antenna Analyzer Test Port:
 Type N: +23 dBm, ±50 VDC

Environmental:
 MIL-PRF-28800F Class 2
 Operating: -10° C to 55° C, humidity 85%
 Storage: -51° C to 71° C
 Altitude: 4600 meters, operating and non-operating

Safety:
 Conforms to EN 61010-1 for Class 1 portable equipment

Electromagnetic Compatibility:
 Meets European Community requirements for CE marking

Size: 315 x 211 x 94 mm (12.4 x 8.3 x 3.7 in.)
Weight: 4 kg (9 lbs.)

* Excludes mismatch errors.
 Excludes noise, zero set, zero drift for levels <-20 dBm.
 Excludes digital modulation uncertainty between +17 and +20 dBm.
 **After 30 min warm-up

Ordering Information

Model

MT8222A - BTS Master

100 kHz to 7.1 GHz

Standard

Cable and Antenna Analyzer

Frequency Range: 10 MHz to 4 GHz

Spectrum Analyzer

Frequency Range: 100 kHz to 7.1 GHz

Power Meter

Frequency Range: 100 kHz to 7.1 GHz

Optional

Interference Analyzer

Frequency Range: 100 kHz to 7.1 GHz

Channel Scanner

Frequency Range: 100 kHz to 7.1 GHz

W-CDMA/HSDPA Analyzer

Frequency Range: 824 to 894 MHz, 1710 to 2170 MHz, and 2300 to 2700 MHz

GSM/GPRS/EDGE Analyzer

Frequency Range: 380 to 400 MHz, 410 to 430 MHz, 450 to 468 MHz, 478 to 496 MHz, 698 to 746 MHz, 747 to 792 MHz, 806 to 866 MHz, 824 to 894 MHz, 890 to 960 MHz, 880 to 960 MHz, 876 to 960 MHz, 870 to 921 MHz, 1710 to 1990 MHz

Fixed WiMAX Analyzer

Frequency Range: 2.3 to 2.7 GHz, 3.3 to 3.8 GHz, 5.25 to 5.875 GHz

Mobile WiMAX Analyzer

Frequency Range: 2.3 to 2.7 GHz, 3.3 to 3.8 GHz

CDMA Analyzer

Frequency Range: 1 MHz to 2.7 GHz

EVDO Analyzer

Frequency Range: 1 MHz to 2.7 GHz

TD-SCDMA Analyzer

Frequency Range: 400 MHz to 2.7 GHz

Options

MT8222A-005	Power Monitor (requires external detector)**
MT8222A-010	Bias Tee variable voltage
MT8222A-10A	High Voltage Bias Tee
MT8222A-019	High Accuracy Power Meter (PSN50 sensor not included)
MT8222A-025	Interference Analysis
MT8222A-026	6 GHz Cable and Antenna Analyzer (10 MHz to 6 GHz)
MT8222A-027	Channel Scanner
MT8222A-028	CW Signal Generator (requires CW Signal Generator kit)
MT8222A-031	GPS Receiver (includes GPS antenna, Anritsu part number: 2000-1410)
MT8222A-033	cdmaOne and CDMA2000 1xRTT Over The Air (OTA)****
MT8222A-034	EVDO Over the Air (OTA)****
MT8222A-035	W-CDMA/HSDPA (OTA)****
MT8222A-037	Mobile WiMAX Over The Air (OTA) Measurements
MT8222A-038	TD-SCDMA Over The Air(OTA) Measurements
MT8222A-040	GSM/GPRS/EDGE RF Measurement
MT8222A-041	GSM/GPRS/EDGE Demodulation
MT8222A-042	CDMA RF Measurements
MT8222A-043	cdmaOne and CDMA2000 1xRTT Demodulator
MT8222A-044	W-CDMA/HSDPA RF Measurement
MT8222A-045	W-CDMA Demodulation
MT8222A-046	Fixed WiMAX RF Measurement
MT8222A-047	Fixed WiMAX Demodulation
MT8222A-051	T1/FT1 BERT (Bit-Error-Rate-Tester)**
MT8222A-052	E1-2 Mb/s Bit-Error-Rate-Tester (BERT)**
MT8222A-053	T3/T1/FT1 BERT (Bit-Error-Rate-Tester)**
MT8222A-060	TD-SCDMA RF Measurement
MT8222A-061	TD-SCDMA Demodulation
MT8222A-062	EVDO RF Measurements
MT8222A-063	EVDO Demodulator

MT8222A-064	DVB-T/H Digital Video Measurement
MT8222A-065	W-CDMA/HSDPA Demodulation***
MT8222A-066	Mobile WiMAX RF Measurements
MT8222A-067	Mobile WiMAX Demodulator

High Accuracy Power Meter Accessories

PSN50	High Accuracy Power Sensor, 50 MHz to 6 GHz
MA24106A	High Accuracy Power Sensor, 50 MHz to 6 GHz
3-2000-1498	USB A/mini-B cable 10 ft
3-1010-122	Attenuator (Bi-directional), 20 dB, 5 watt, DC to 12.4 GHz, N(m) to N(f)
3-1010-123	Attenuator (Bi-directional), 30 dB, 50 watt, DC to 8.5 GHz, N(m) to N(f)
3-1010-124	Attenuator (Uni-directional), 40 dB, 100 watt, DC to 8.5 GHz, N(m) to N(f)

Standard Accessories

10580-00156	BTS Master User's Guide
65681	Soft Carrying Case
40-168-R	AC/DC Adapter
806-141	Automotive Cigarette Lighter/12 Volt DC Adapter
3-2000-1567	512 MB Compact Flash Memory Module
2000-1520-R	2 GB USB Memory Module
2300-498	Anritsu Master Software Tools
633-44	Rechargeable Battery, Li-Ion
3-2000-1360	USB A/mini-B cable 6 ft
3-806-152	Cross-over Ethernet cable
1091-27	Adapter, DC to 18 GHz, N(m)-SMA(f), 50 Ω
1091-172	Adapter, DC to 1.3 GHz, N(m) - BNC(f), 50 Ω
One Year Warranty	
Certificate of Calibration and Conformance	

Optional Accessories

800-109	Detector Extender Cable, 7.6 m (25 ft.)
800-111	Detector Extender Cable, 30.5 m (100 ft.)
2000-1374	Dual External, Li-Ion Charger with Universal Power Supply
2000-1410	Magnet Mount GPS Antenna with 3 m (15 ft) Cable
2000-1501-R	256 MB USB Memory Module
2000-1520-R	2 GB USB Memory Module
760-243-R	Transit Case for Anritsu MT8222A BTS Master
1N50C	Limiter, N(m) to N(f), 50 Ω, 10 MHz to 18 GHz
790-641	Cable Lock
42N50-20	Attenuator, 20 dB, 5 watt, DC to 18 GHz, N(m) to N(f)
42N50A-30	Attenuator, 30 dB, 50 watt, DC to 18 GHz, N(m) to N(f)
22N50	Open/Short, DC to 18 GHz, N(m), 50 Ω
22NF50	Open/Short, DC to 18 GHz, N(f), 50 Ω
SM/PL-1	Precision Load, DC to 6 GHz, 42 dB, N(m), 50 Ω
SM/PLNF-1	Precision Load, DC to 6 GHz, 42 dB, N(f), 50 Ω
OSLN50-1	Precision Open/Short/Load, DC to 6 GHz, 42 dB, 50 Ω, N(m)
OSLNF50-1	Precision Open/Short/Load, DC to 6 GHz, 42 dB, 50 Ω, N(f)
2000-767	Precision Open/Short/Load, DC to 4 GHz, 7/16 DIN(m), 50 Ω
2000-768	Precision Open/Short/Load, DC to 4 GHz, 7/16 DIN(f), 50 Ω
1091-26	N(m) to SMA(m) DC to 18 GHz, 50 Ω
1091-27	N(m) to SMA(f) DC to 18 GHz, 50 Ω
1091-80	N(f) to SMA(m) DC to 18 GHz, 50 Ω
1091-81	N(f) to SMA(f) DC to 18 GHz, 50 Ω

*All the options are upgradeable at Service Centers except T1 option.

**Option 5 and Options 51, 52 and 53 are mutually exclusive.

***Option 65 includes Option 45.

****Requires Option 31 GPS

Adapters

510-90	7/16 DIN(f) to N(m), DC to 7.5 GHz, 50 Ω
510-91	7/16 DIN(f) to N(f), DC to 7.5 GHz, 50 Ω
510-92	7/16 DIN(m) to N(m), DC to 7.5 GHz, 50 Ω
510-93	7/16 DIN(m) to N(f), DC to 7.5 GHz, 50 Ω
510-96	7/16 DIN(m) to 7/16 DIN(m), DC to 7.5 GHz, 50 Ω
510-97	7/16 DIN(f) to 7/16 DIN(f), DC to 7.5 GHz, 50 Ω
510-102	N(m) to N(m) 90° right angle, DC to 11 GHz, 50 Ω

Precision Adapters

34NN50A	Precision Adapter, DC to 18 GHz, 50 Ω, N(m) to N(m)
34NFN50	Precision Adapter, DC to 18 GHz, 50 Ω, N(f) to N(f)

Directional Antennas

2000-1411	Portable Yagi Antenna, 10 dBd, N(f), 822 to 900 MHz
2000-1412	Portable Yagi Antenna, 10 dBd, N(f), 885 to 975 MHz
2000-1413	Portable Yagi Antenna, 10 dBd, N(f), 1.71 to 1.88 GHz
2000-1414	Portable Yagi Antenna, 9.3 dBd, N(f), 1.85 to 1.99 GHz
2000-1415	Portable Yagi Antenna, 10 dBd, N(f), 2.4 to 2.5 GHz
2000-1416	Portable Yagi Antenna, 10 dBd, N(f), 1.92 to 2.17 GHz

GPS Antenna

2000-1410	Magnet Mount GPS Antenna with 15 ft. cable
-----------	--

Portable Antennas

2000-1030	SMA(m), 1.71 to 1.88 GHz, 50 Ω
2000-1031	SMA(m), 1.85 to 1.99 MHz, 50 Ω
2000-1032	SMA(m), 2.4 to 2.5 GHz, 50 Ω
2000-1035	SMA(m), 896 to 941 MHz, 50 Ω
2000-1200	SMA(m), 806 to 869 MHz, 50 Ω
2000-1361	SMA(m), 5725 to 5825 MHz, 50 Ω
2000-1473	SMA(m), 870 to 960 MHz, 50 Ω
2000-1474	SMA(m), 2.41 to 2.5 GHz, 50 Ω
2000-1475	SMA(m), 1920 to 1980, 2.11 to 2.17 GHz, 50 Ω
61532	Antenna Kit: 2000-1030, 2000-1031, 2000-1032, 2000-1035, 2000-1200, and 2000-1361

Attenuator

42N50A-30	30 dB, 50 watt, Bi-directional, DC to 18 GHz, N(m) to N(f)
-----------	--

Cables

806-16	Bantam Plug to Bantam Plug
806-116	Bantam Plug to BNC
806-117	Bantam "Y" Plug to RJ48
3-806-169	72-inch (1.8 m), BNC to BNC, 75 Ω RG59 type coax cable
806-176-R	Bantam Plug to Alligator Clips
806-177-R	RJ48 to RJ48

Band Pass Filters

1030-105-R	890 to 915 MHz Band, N(m) to N(f), 50 Ω
1030-106-R	1710 to 1790 MHz Band, N(m) to N(f), 50 Ω
1030-107-R	1910 to 1990 MHz Band, N(m) to N(f), 50 Ω
1030-109-R	824 to 849 MHz Band, N(m) to SMA(f), 50 Ω
1030-110-R	880 to 915 MHz Band, N(m) to SMA(f), 50 Ω
1030-111-R	1850 to 1910 MHz Band, N(m) to SMA(f), 50 Ω
1030-112-R	2400 to 2484 MHz Band, N(m) to SMA(f), 50 Ω
1030-114-R	806 to 869 MHz Band, N(m) to SMA(f), 50 Ω

Test Port Cable Armored

15NN50-1.5C	1.5 meters, N(m) to N(m), 6 GHz, 50 Ω
15NNF50-1.5B	1.5 meters N(m) to N(f), 18 GHz, 50 Ω
15NN50-3.0C	3.0 meters, N(m) to N(m), 6 GHz, 50 Ω
15NN50-5.0C	5.0 meters, N(m) to N(m), 6 GHz, 50 Ω
15NNF50-1.5C	1.5 meters, N(m) to N(f), 6 GHz, 50 Ω
15NNF50-3.0C	3.0 meters, N(m) to N(f), 6 GHz, 50 Ω
15NN50-5.0C	5.0 meters, N(m) to N(m), 6 GHz, 50 Ω
15ND50-1.5C	1.5 meters, N(m) to 7/16 DIN(m), 6 GHz, 50 Ω
15NDF50-1.5C	1.5 meters, N(m) to 7/16 DIN(f), 6 GHz, 50 Ω

Power Monitor Detectors

560-7N50B	0.01 to 20 GHz
560-7S50B	0.01 to 20 GHz
560-7K50	0.01 to 40 GHz
560-7VA50	0.01 to 50 GHz

CW Signal Generator Kit

67276	CW Signal Generator Kit (includes the 4 parts listed below)
65-54	Attenuator, 0-90 dB (1 dB and 10 dB steps), 2.5 GHz, N(f), N(f)
510-102	Adaptor, 90°, N(m), N(m)
SC7651	Power Splitter, 50 Ω, N(f), N(m), N(f)
67263	Cable, N(m), N(m)

Anritsu

Anritsu Corporation

5-1-1 Onna, Atsugi-shi, Kanagawa, 243-8555 Japan
Phone: +81-46-223-1111
Fax: +81-46-296-1264

• U.S.A.

Anritsu Company

1155 East Collins Boulevard, Suite 100,
Richardson, Texas 75081 U.S.A.
Toll Free: 1-800-ANRITSU (267-4878)
Phone: +1-972-644-1777
Fax: +1-972-671-1877

• Canada

Anritsu Electronics Ltd.

700 Silver Seven Road, Suite 120, Kanata,
Ontario K2V 1C3, Canada
Phone: +1-613-591-2003
Fax: +1-613-591-1006

• Brazil

Anritsu Eletrônica Ltda.

Praca Amadeu Amaral, 27-1 Andar
01327-010 - Paraiso, São Paulo, Brazil
Phone: +55-11-3283-2511
Fax: +55-11-3886940

• Mexico

Anritsu Company, S.A. de C.V.
Av. Ejército Nacional No. 579 Piso 9, Col. Granada
11520 México, D.F., México
Phone: +52-55-1101-2370
Fax: +52-55-5254-3147

• U.K.

Anritsu EMEA Ltd.

200 Capability Green, Luton, Bedfordshire LU1 3LU, U.K.
Phone: +44-1582-433280
Fax: +44-1582-731303

• France

Anritsu S.A.

16/18 Avenue du Québec-SILIC 720
91961 COURTABOEUF CEDEX, France
Phone: +33-1-60-92-15-50
Fax: +33-1-64-46-10-65

• Germany

Anritsu GmbH

Nemetschek Haus, Konrad-Zuse-Platz 1
81829 München, Germany
Phone: +49 (0) 89 442308-0
Fax: +49 (0) 89 442308-55

• Italy

Anritsu S.p.A.

Via Elio Vittorini, 129, 00144 Roma, Italy
Phone: +39-06-509-9711
Fax: +39-06-502-2425

• Sweden

Anritsu AB

Borgafjordsgatan 13, 164 40 Kista, Sweden
Phone: +46-8-534-707-00
Fax: +46-8-534-707-30

• Finland

Anritsu AB

Teknobulevardi 3-5, FI-01530 Vantaa, Finland
Phone: +358-20-741-8100
Fax: +358-20-741-8111

• Denmark

Anritsu A/S

Kirkebjerg Allé 90 DK-2605 Brøndby, Denmark
Phone: +45-72112200
Fax: +45-72112210

• Spain

Anritsu EMEA Ltd.

Oficina de Representación en España

Edificio Veganova
Avda de la Vega, n° 1 (edf 8, pl1, of 8)
28108 ALCOBENDAS - Madrid, Spain
Phone: +34-914905761
Fax: +34-914905762

• Russia

Anritsu EMEA Ltd.

Representation Office in Russia

Tverskaya str. 16/2, bld. 1, 7th floor.
Russia, 125009, Moscow
Phone: +7-495-363-1694
Fax: +7-495-935-8962

• United Arab Emirates

Anritsu EMEA Ltd.

Dubai Liaison Office

P O Box 500413 - Dubai Internet City
Al Thuraya Building, Tower 1, Suite 701, 7th Floor
Dubai, United Arab Emirates
Phone: +971-4-3670352
Fax: +971-4-3688460

• Singapore

Anritsu Pte. Ltd.

60 Alexandra Terrace, #02-08, The Comtech (Lobby A)
Singapore 118502
Phone: +65-6282-2400
Fax: +65-6282-2533

• India

Anritsu Pte. Ltd.

India Liaison Office

Unit No.S-3, Second Floor, Esteem Red Cross Bhavan,
No.26, Race Course Road, Bangalore 560 001 India
Phone: +91-80-32944707
Fax: +91-80-22356648

• P. R. China (Hong Kong)

Anritsu Company Ltd.

Units 4 & 5, 28th Floor, Greenfield Tower, Concordia Plaza,
No. 1 Science Museum Road, Tsim Sha Tsui East,
Kowloon, Hong Kong, P.R. China
Phone: +852-2301-4980
Fax: +852-2301-3545

• P. R. China (Beijing)

Anritsu Company Ltd.

Beijing Representative Office

Room 1515, Beijing Fortune Building,
No. 5 . Dong-San-Huan Bei Road,
Chao-Yang District, Beijing 100004, P.R. China
Phone: +86-10-6590-9230
Fax: +82-10-6590-9235

• Korea

Anritsu Corporation, Ltd.

8F Hyunjuk Bldg, 832-41, Yeoksam-Dong,
Kangnam-ku, Seoul, 135-080, Korea
Phone: +82-2-553-6603
Fax: +82-2-553-6604

• Australia

Anritsu Pty Ltd.

Unit 21/270 Ferntree Gully Road, Notting Hill
Victoria, 3168, Australia
Phone: +61-3-9558-8177
Fax: +61-3-9558-8255

• Taiwan

Anritsu Company Inc.

7F, No. 316, Sec. 1, Neihu Rd., Taipei 114, Taiwan
Phone: +886-2-8751-1816
Fax: +886-2-8751-1817

